

INDUSTRY F420

SPECIFICATION



PRINTING

Print technology:	FFF
Build volume:	380 × 380 × 420 mm (60 648 cm ³)
Min. layer height:	50 µm
Number of printheads:	2, purging system
Nozzle diameter:	0.5/0.5 mm or 0.4/0.4mm
Filament diameter:	1.75 mm
Printhead temperature:	500°C
Buildplate temperature:	180°C
Chamber temperature:	180°C (active heating)
Filament chamber temperature:	50°C

SPEED

Travel move:	1000 mm/s
Printing speed:	up to 400 mm/s

DIMENSIONS AND MASS

External dimensions:	1900 × 940 × 900 mm
Mass:	350 kg

CONSTRUCTION

Chassis:	steel
External:	steel and vacuformed ABS, chamber lined with stainless steel
Build surface:	borosilicate glass / vacuum sealed plastic sheets
Positioning resolution XY:	0.006 mm
Positioning resolution Z:	0.0007 mm

ENVIRONMENT

Working temperature:	15-32°C
Storage temperature:	0-32°C

POWER

Power requirements:	- 230V 1ph with 32A (3n+p+e) IEC 60309 plug (recommended) - 230V 1ph 20A direct connection
Max power draw:	4600 W
Average power draw:	1500 W
Communication:	ethernet, Wi-Fi, USB drive

SOFTWARE

Slicing software:	3DGence SLICER 4.0
Cloud based services:	3DGence CLOUD

SAFETY

Filtration:	advanced filtration unit
Sensors:	main chamber door, top access hatch, thermal sensors, emergency switch
UPS device:	yes, optional
Others:	software access overdrive - remote shut down

INDUSTRY F420

MODULES

M280

TEMPERATURE:

up to 280°C

NOZZLE DIAMETER:


0,5 mm/0,5 mm

MODEL MATERIAL:

PLA, ABS, ASA, PA6

SUPPORT MATERIAL:

ESM-10, HIPS

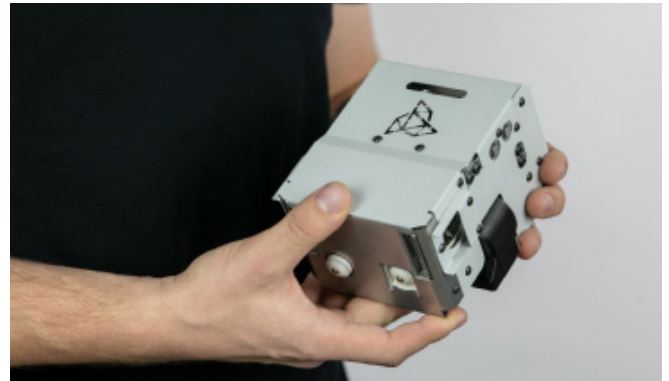

M360

TEMPERATURE:

up to 360°C

NOZZLE DIAMETER:

0,4 mm/0,4 mm

MODEL MATERIAL:

PC, ULTEM™ filament

SUPPORT MATERIAL:

ESM-10



M500

TEMPERATURE:

up to 500°C

NOZZLE DIAMETER:

0,4 mm/0,4 mm

MODEL MATERIAL:

PEEK, PEKK

SUPPORT MATERIAL:

ESM-10



Flexibility and performance

Job-specific printing
modules and developed
printing profiles